

General Data

| | |
|--------------------------|--------------------------|
| Emission Compliance | Stage V/T4f |
| Free Air Delivery | 20.0 m ³ /min |
| Rated Operating Pressure | 7.00 bar |

Engine

| | |
|----------------------|------------|
| Make | Cummins |
| Model | B6.7 |
| Number of Cylinders | 6.0 |
| Full load speed | 2000.0 RPM |
| Power | 173.0 kW |
| Electrical | 24 V |
| Cooling | Water |
| Fuel Tank capacity | 370.00 L |
| AdBlue tank capacity | 57.00 L |

Sound Level Data

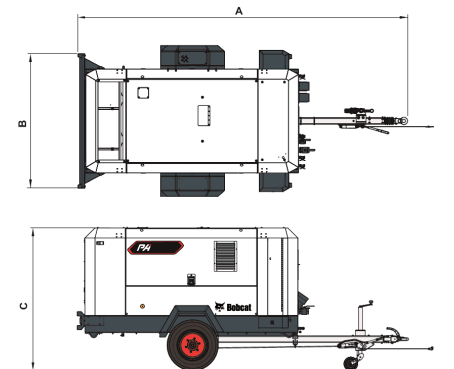
| | |
|--|------|
| Fully compliant to outdoor noise directive 2000/14/EC (2006) | 99.0 |
|--|------|

Weights

| | |
|--------------------------------------|----------------|
| Weight (net) fixed/adjustable | 2708 / 2778 kg |
| Weight (working) fixed/adjustable | 3077 / 3147 kg |
| Weight max (ref. Dataplate) | 3500 kg |
| Weight on shipping support (net) | 2319 kg |
| Weight on shipping support (working) | 2688 kg |

Standard Features

| | |
|--|--------------------------------------|
| Central lifting point | Emergency stop |
| Fuel/water separator | Steel |
| No roadlights | Toolbox |
| "Push after warm-up" button | Low Fuel Light including fuel switch |
| Bunded base with 110% fluids containment with central drains | 28mm tow eye |
| Document box | 40mm tow eye |
| Jockey Wheel | 50mm tow eye |
| LED CE and UK (13 pins) | 68mm tow eye |
| Diesel particulate filter | 76mm tow eye |
| Spark Arrestor | 50mm ball hitch |
| Battery isolator | |

Dimension


| | | | |
|------|-----------|-----|-----------|
| (A) | 4920.0 mm | (B) | 2268.0 mm |
| (A*) | 3421.0 mm | (C) | 2090.0 mm |